

2" ½ VALVES



SCREW CONNECTION AE2460B With Pneumatic Valve

The classic 90° valve with female thread



PRODUCT CERTIFICATIONS

STANDARD



OPZIONALI



VALVE TECHNICAL FEATURES

Features		Values
Out		2" 1/2 Gas
In		2" 1/2 Gas
Working Pressure		1,5-8 bar
Standard Temperature Range		-40 °C ; +100 °C
High Range Temperature		-20 °C ; +200 °C
Kv		114 m³/h
Weight		3.08 kg
Protection Level		IP65


VALVE TECHNICAL FEATURES

Features		Values
Air quality classes (ISO 8573-1)	For Solid	2
	For Water with $T > +3^{\circ}\text{C}$	4
	For Water with $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	For Water with $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	For Oil	1

PARTS LIST

No.	Description	Material
1	Screw M6	SS
2	Washer	SS
3	Cover 3/4"	Die Cast Alu
4	Diaphragm 3/4"	TPE
5	Screw M8	SS
6	Washer	SS
7	Cover 2" 1/2	Die Cast Alu
8	Spring	SS
9	Spring	SS
11	Body 2" Screw	Die Cast Alu
10a	STD Diaphragm 2"1/2	TPE
10b	HT Diaphragm 2" 1/2Kit	NBR+PTFE
E	Optional Fitting	Nickeled Brass

Immagine

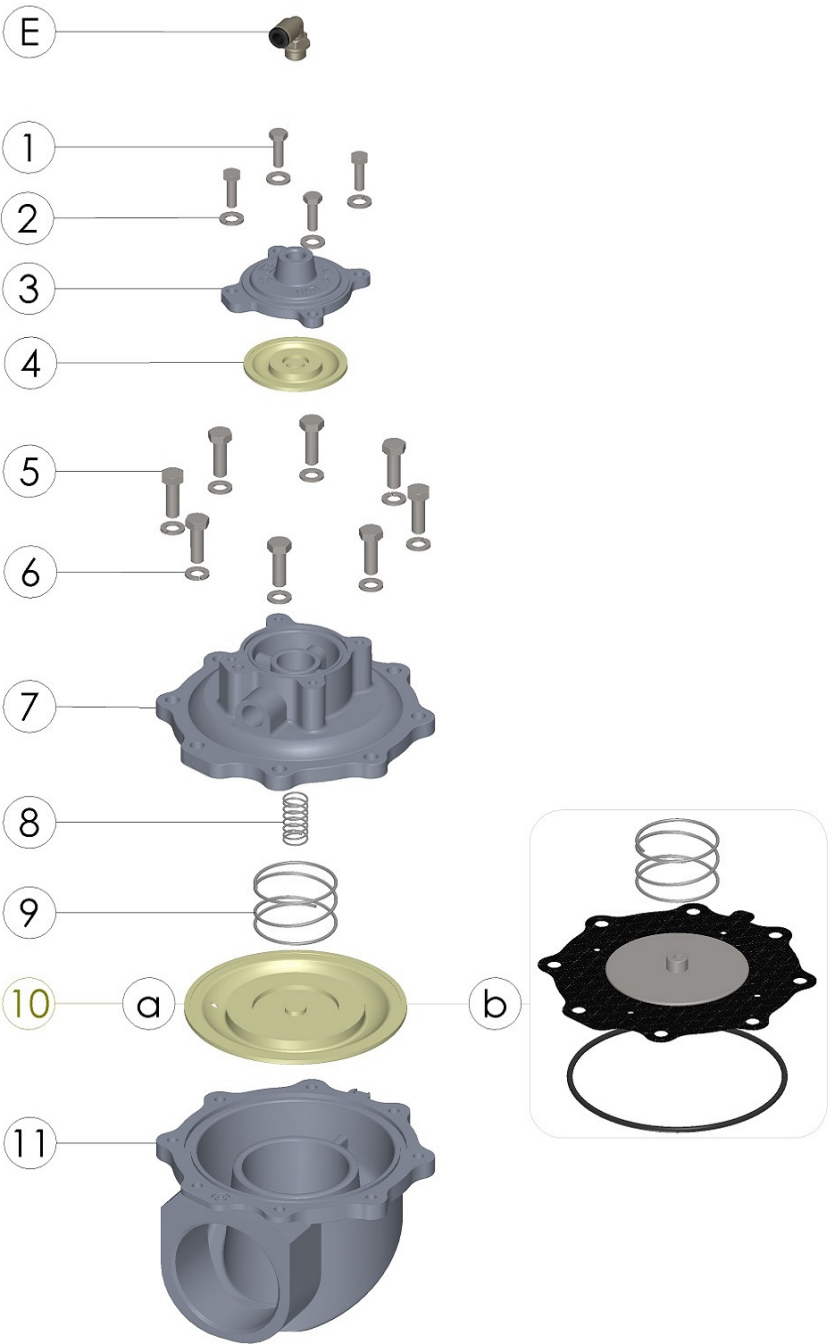

Technical drawing of the 205mm assembly showing three views: side, front, and top. The side view shows dimensions A, D, 30⁰/₋₂, 95, 177, 167,9, and 187,9. The front view shows dimensions 32,9, C, 125, 145, 43, B, and 158,9. The top view shows two views of the flange with a note "minimal pitch for assembly 205mm".

HOLES	STANDARD	OPTIONAL
A	2 ½" G (ISO 228/1)	-
B	2 ½" G (ISO 228/1)	-
C	3/8" G (ISO 228/1)	-
D		1/4" G (ISO 228/1)
		Ø16mm - 5/16"

CONSUMPTION GRAPHS

