

VALVOLE 2" ½



ATTACCO A VITE AE2460B Con Valvola Pneumatica

Le classiche valvole a 90° con attacco filettato femmina



CERTIFICAZIONI PRODOTTO

STANDARD



OPZIONALI




SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Uscita		2" 1/2 Gas
Ingresso		2" 1/2 Gas
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °C
Kv		114 m ³ /h
Peso		3.08 kg
Grado di protezione (standard)		IP65


SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con $T > +3^{\circ}\text{C}$	4
	Per Acqua con $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	Per Acqua con $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	Per Olio	1

LISTA COMPONENTI

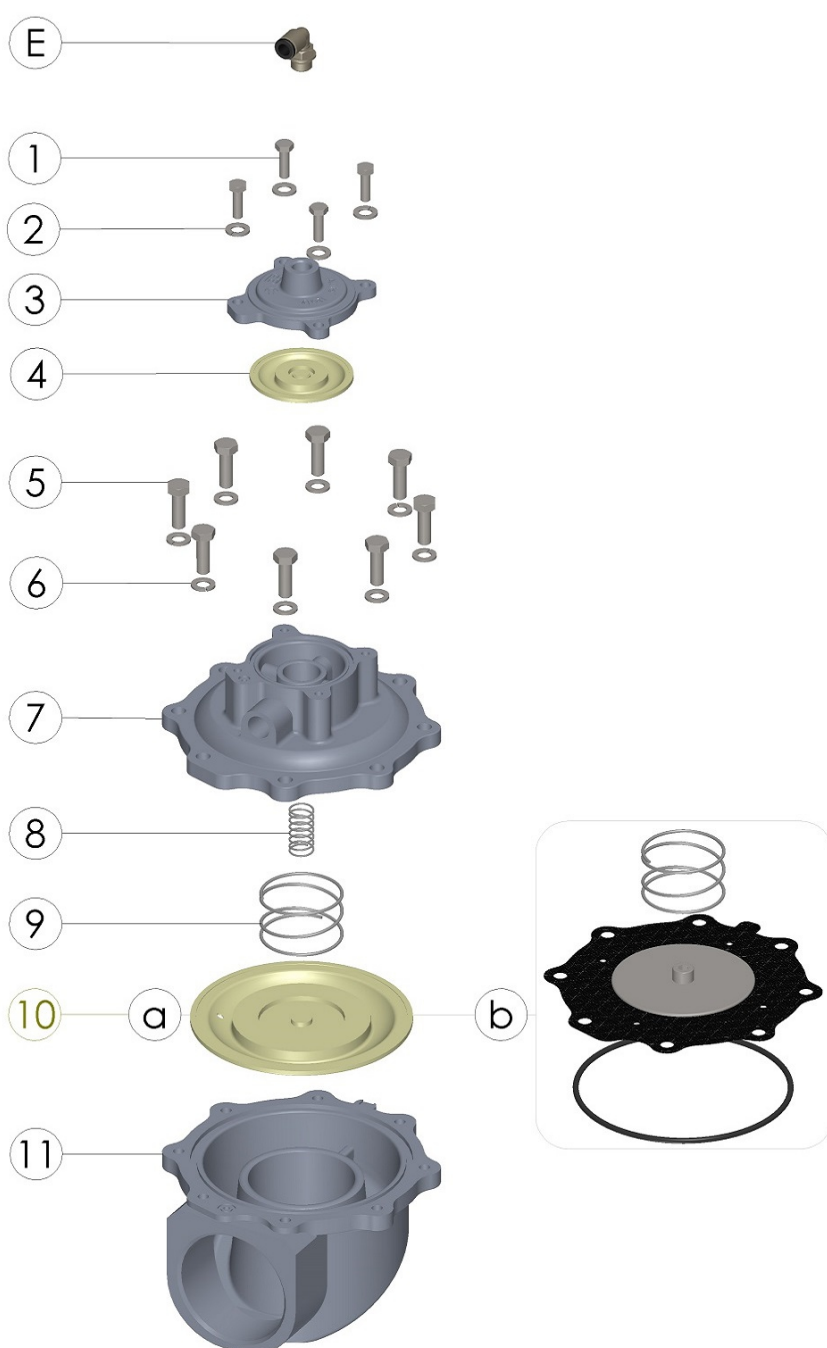No.	Descrizione	Materiale	Immagine
1	Screw M6	SS	
2	Washer	SS	
3	Cover 3/4"	Die Cast Alu	
4	Diaphragm 3/4"	TPE	
5	Screw M8	SS	
6	Washer	SS	
7	Cover 2" 1/2	Die Cast Alu	
8	Spring	SS	
9	Spring	SS	
11	Body 2" Screw	Die Cast Alu	
10a	STD Diaphragm 2"1/2	TPE	
10b	HT Diaphragm 2" 1/2Kit	NBR+PTFE	
E	Optional Fitting	Nickeled Brass	

LAYOUT DIMENSIONALI

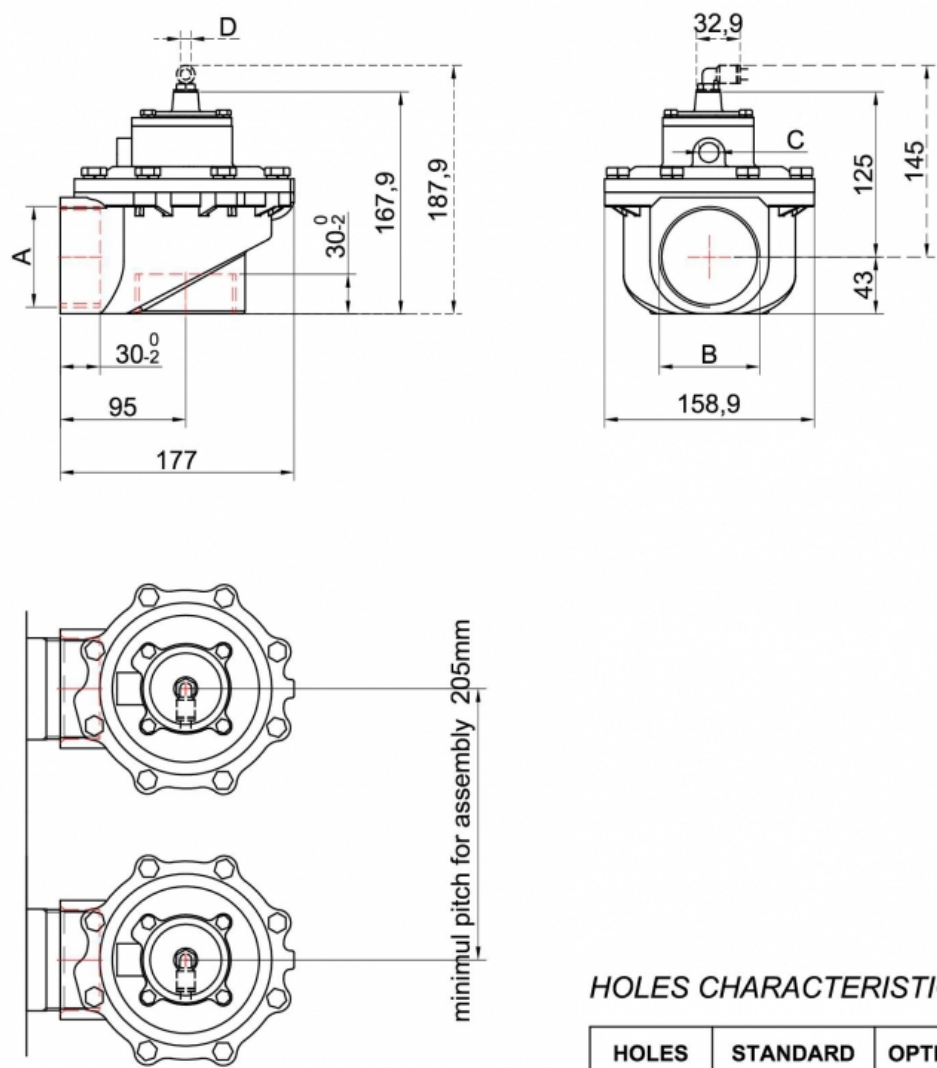

HOLES CHARACTERISTICS

HOLES	STANDARD	OPTIONAL
A	2 1/2" G (ISO 228/1)	-
B	2 1/2" G (ISO 228/1)	-
C	3/8" G (ISO 228/1)	-
D		1/4" G (ISO 228/1) Rilsan 8mm - 5/16"

TABELLE CONSUMI

