

VALVOLE 2" ½



INTEGRATA PER SERBATOIO Ø 12" AE2460I12 Con Valvola Pneumatica

Valvole ad alte prestazioni integrate nel serbatoio



CERTIFICAZIONI PRODOTTO

STANDARD




OPZIONALI



SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Uscita		Pipe 2"1/2
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °C
Peso		11 kg
Grado di protezione (standard)		IP65
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con T > +3°C	4
	Per Acqua con -20°C < T < +3°C	3
	Per Acqua con -40°C < T < -20°C	2
	Per Olio	1

LISTA COMPONENTI

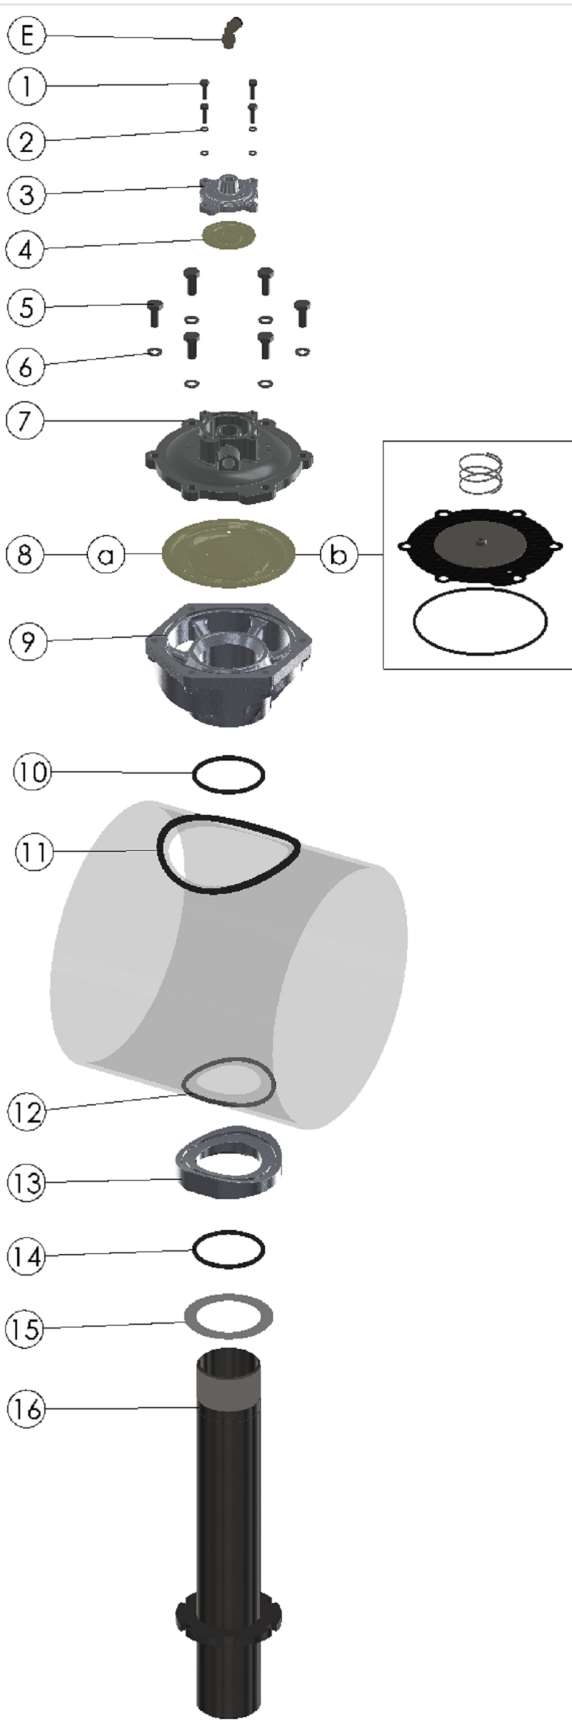No.	Descrizione	Materiale	Immagine
1	Screw M6	SS	
2	Washer	SS	
3	Cover 3/4"	Die Cast Alu	
5	Screw M8	SS	
6	Washer	SS	
7	Cover 2" 1/2	Die Cast Alu	
8a	STD Diaphragm 2"1/2	TPE	
8b	HT Diaphragm 2" 1/2Kit	NBR+PTFE	
9	Body 2" 1/2 Integrated	Die Cast Alu	
10	Body Pipe O'Ring	NBR	
11	Body Tank O'Ring	NBR	
12	Clamp Tank O'Ring	NBR	
13	Clamp 2"1/2	Die Cast Alu	
14	Pipe Clamp O'Ring	NBR	
15	Washer 2" 1/2	Pa + Ela	
16	Blow Pipe 2"1/2	CS or SS	
E	Optional Fitting	Nickel Brass	

LAYOUT DIMENSIONALI

(E) Dimension with optional fitting
for rilsan pipe $\varnothing 8$ mm





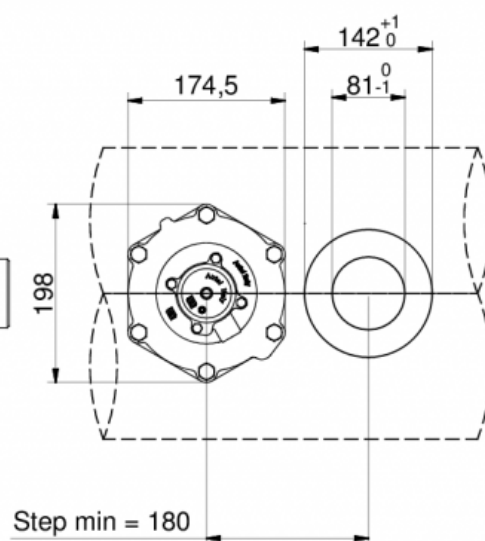


TABELLE CONSUMI

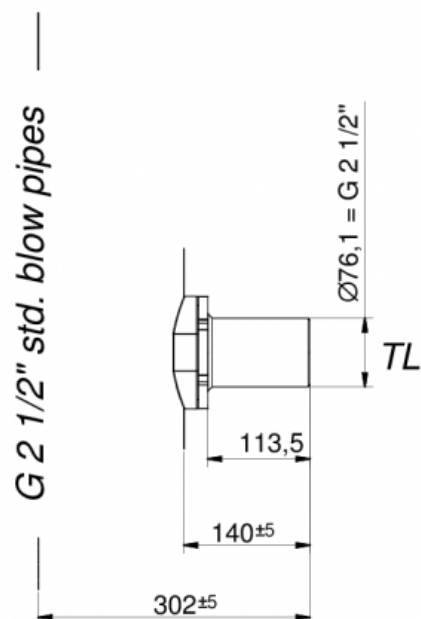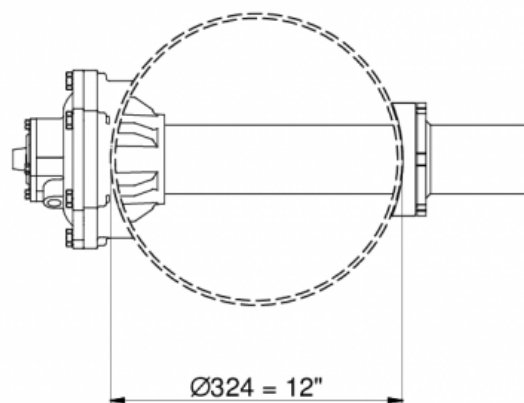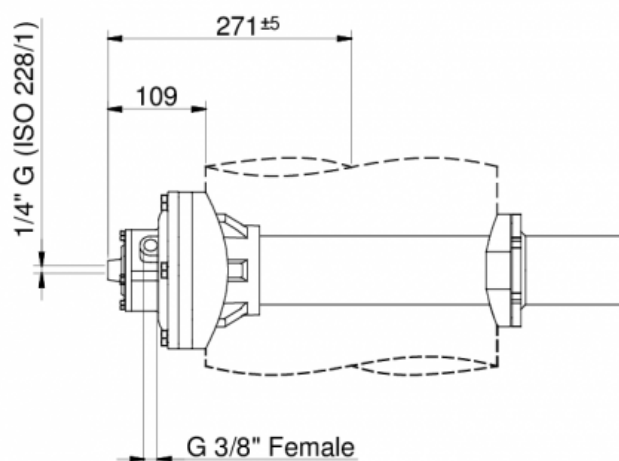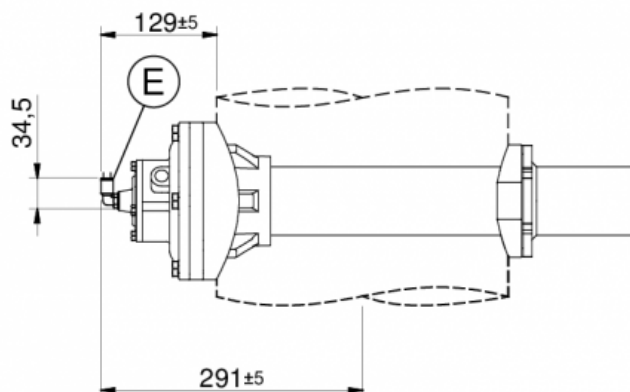