

1" ½ VALVES

INTEGRATED DOUBLE STAGE FOR Ø 6 " TANK WITH BULKHEAD

AE1440I06 With Pilot Group

Hight performance valves integrated in the tank



PRODUCT CERTIFICATIONS

STANDARD



OPZIONALI



VALVE TECHNICAL FEATURES

Features	Values
Out	Pipe 1"1/2
Working Pressure	1,5-8 bar
Standard Temperature Range	-40 °C ; +100 °C
High Range Temperature	-20 °C ; +200 °C


VALVE TECHNICAL FEATURES

Features		Values
Weight		2.3 kg
Protection Level		IP65
Air quality classes (ISO 8573-1)	For Solid	2
	For Water with T > +3°C	4
	For Water with -20°C < T < +3°C	3
	For Water with -40°C < T < -20°C	2
	For Oil	1


PARTS LIST

No.	Description	Material
A	Clip	CS Galvanized
B	Coil	PA
C	Connector	PA + NBR
D	Pilot	SS
1	Screw M6	SS
2	Washer	SS
3	Cover 3/4"	Die Cast Alu
4	Diaphragm 3/4"	TPE
5	Screw M8	SS
6	Washer	SS
7	Cover 1"1/2	Die Cast Alu
8a	STD Diaphragm 1"1/2	TPE
8b	HT Diaphragm 1" 1/2	NBR+PTFE
9	Body 1"1/2 Integrate	Die Cast Alu
10	Body Pipe O'Ring	NBR
11	Body Tank O'Ring	NBR
12	Clamp Tank O'Ring	NBR
13	Clamp 1"1/2	Die Cast Alu
14	Pipe Clamp O'Ring	NBR
15	Washer 1"1/2	Pa + Ela
16	Blow Pipe 1"1/2	CS or SS
17	Gasket	NBR
18	Ring Nut	Die Cast Alu
19	Tapper Gasket	NBR
20	Washer 1"1/2	CS
21	Nut	Die Cast Alu

Immagine

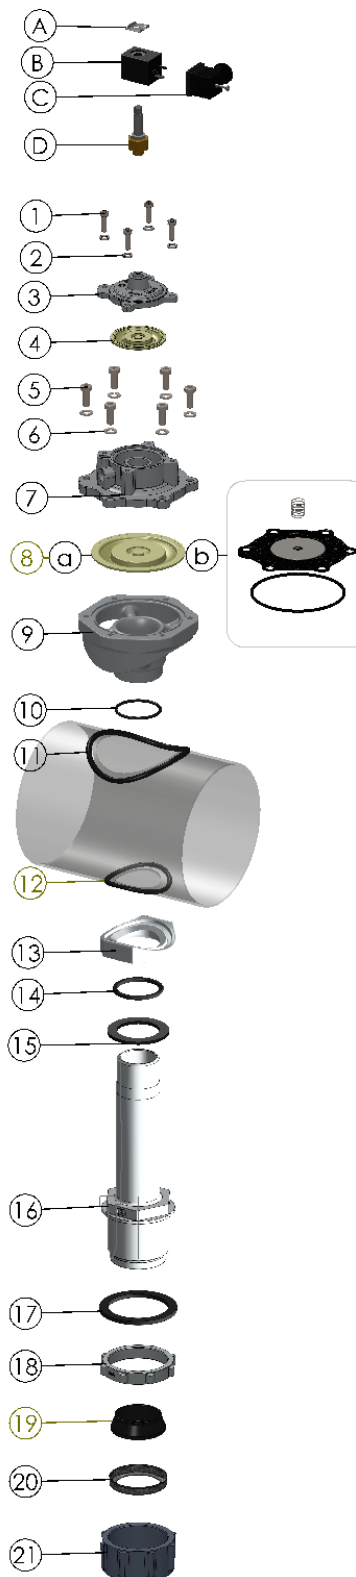

DIMENSIONAL LAYOUT

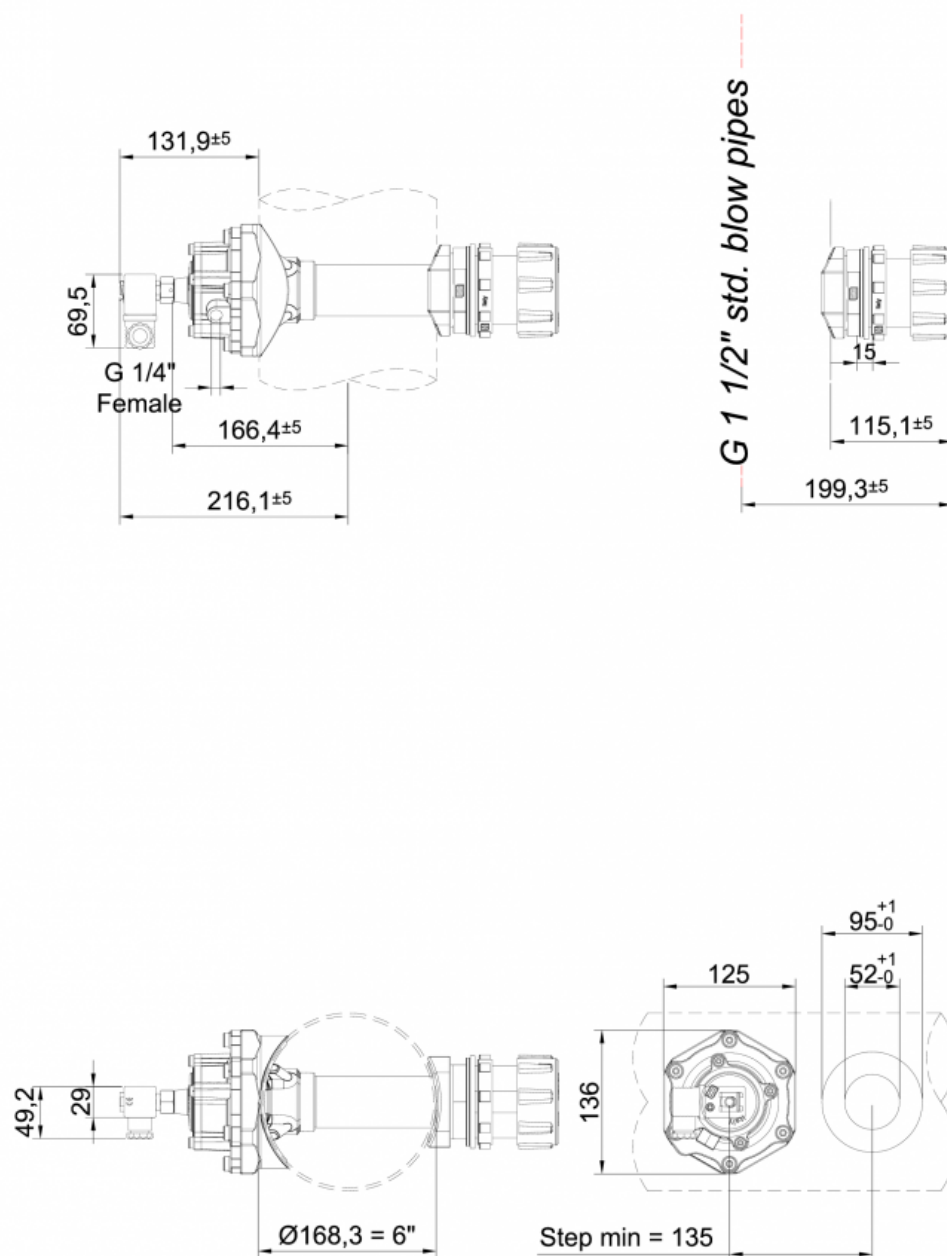

CONSUMPTION GRAPHS

