

3" VALVES

INTEGRATED VALVE FOR Ø 12" TANK

With pneumatic valve

Revolutionary cleaning concept

TRIMEC

Revolutionary cleaning concept, performance and a reduction of air consumption at the same time, working pressure from 1 to 4 bar, minimum pitch 170mm for 3" valves, sonic valve cleaning effect. 40% filter bags surface cleaner for bags > 10m.

PRODUCT CERTIFICATIONS

STANDARD



OPZIONALI




VALVE TECHNICAL FEATURES

Features		Values
Working Pressure		1,5-8 bar
Standard Temperature Range		-40 °C ; +100 °C
High Range Temperature		-20 °C ; +200 °C
Weight		10 kg
Protection Level		IP65
Air quality classes (ISO 8573-1)	For Solid	2
	For Water with T > +3°C	4
	For Water with -20°C < T < +3°C	3
	For Water with -40°C < T < -20°C	2
	For Oil	1


PARTS LIST

No.	Description	Material
1	Pilot Group with Coil	
2	Screw M6	SS
3	Washer Grover M	SS
4	Cover 1"	Die Cast Alu
5	Spring 1"	SS
6	TPU VITON (Higt T)	Small Diaphragm
7	Screw M10	SS
8	Washer Grover M10	SS
9	SPV Cover	Die Cast Alu
10	O-Ring	NBR
11	End Stroke	NBR
12	SPV Spring	SS
13	Piston	Die Cast Alu
14	Body Valve 3"	Die Cast Alu
15	Tank 12"	CS/SS
16	Saddle	Die Cast Alu
17	Blow Pipe 3"	CS/SS

Immagine

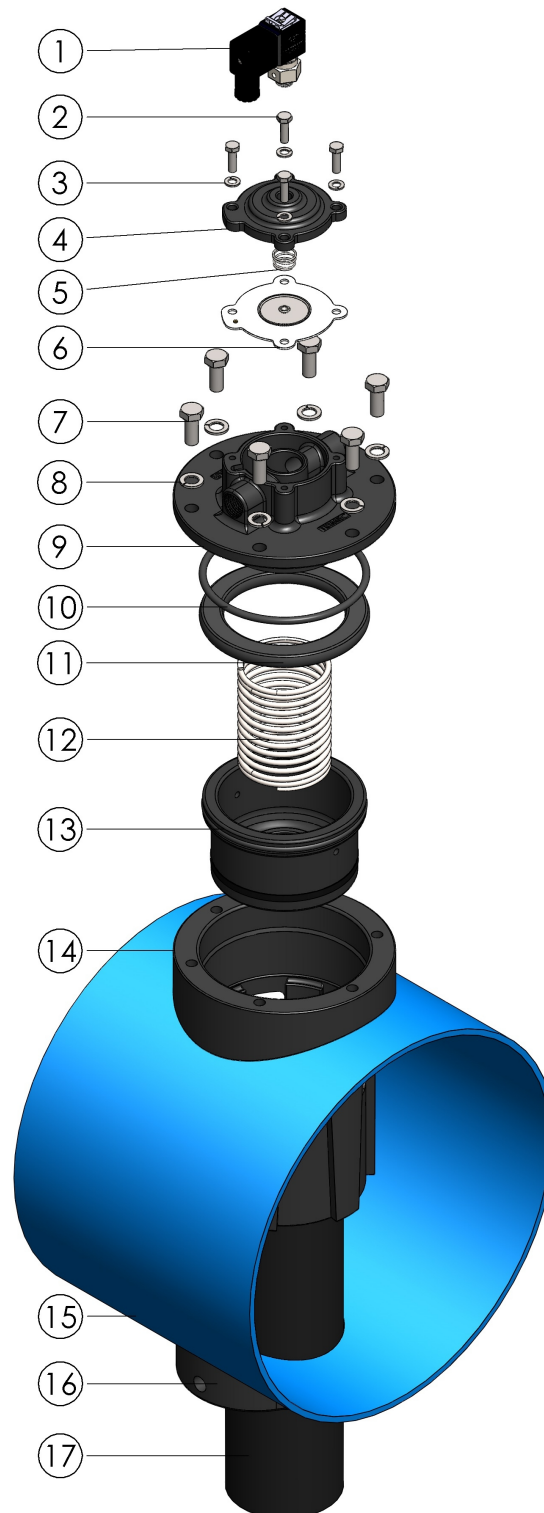

DIMENSIONAL LAYOUT

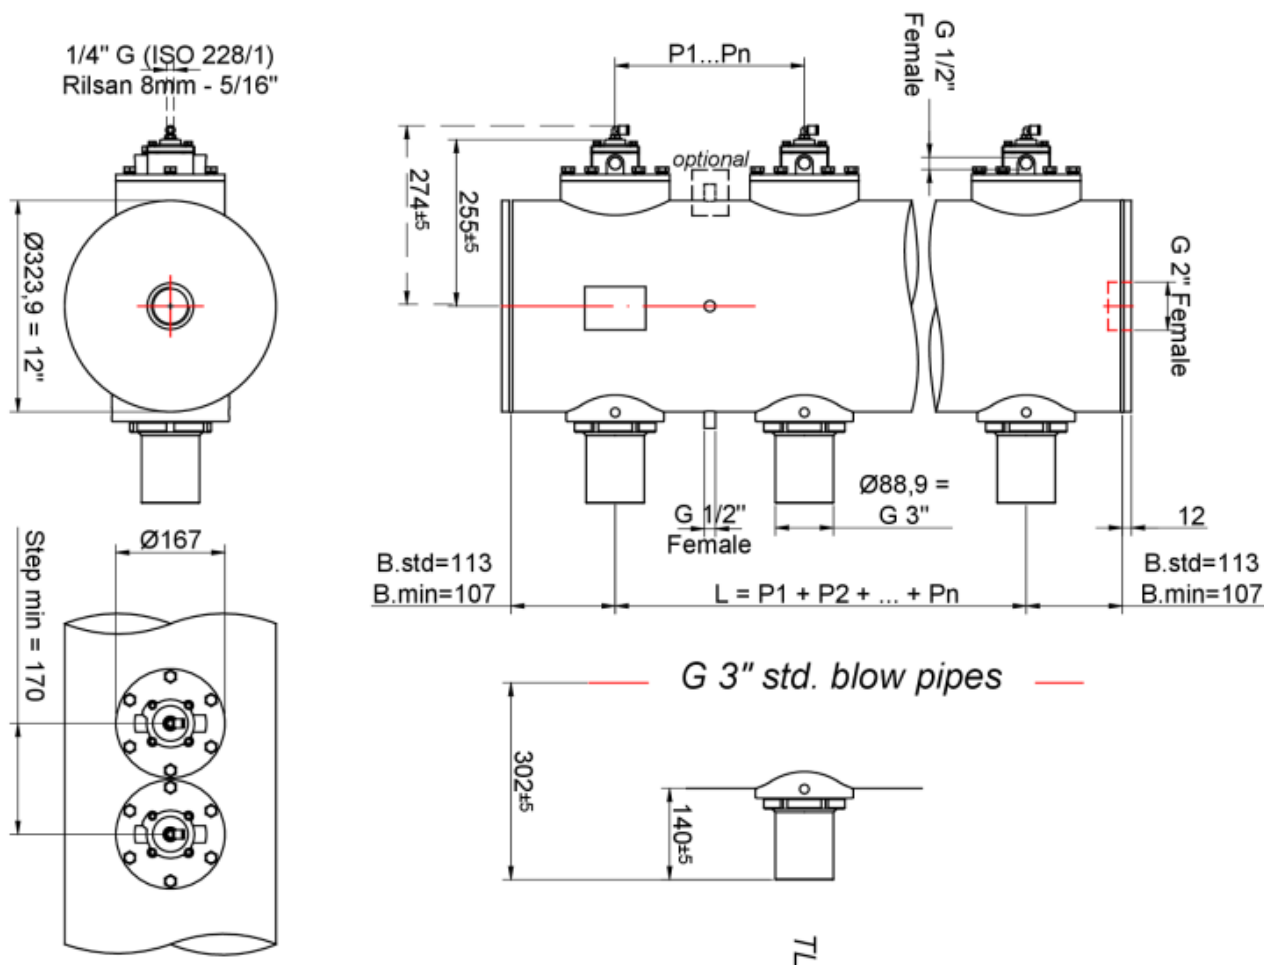

CONSUMPTION GRAPHS

