

1" VALVES



TR2825K06 With Pneumatic Valve

Integrated valve with bulkhead connector included, "All in one! "



PRODUCT CERTIFICATIONS

STANDARD



OPZIONALI



VALVE TECHNICAL FEATURES

Features		Values
Out		Bulkhead 1"
In		Bulkhead 1"
Working Pressure		1,5-8 bar
Standard Temperature Range		-40 °C ; +100 °C
High Range Temperature		-20 °C ; +200 °C
Kv		30 m^3/h
Weight		1,2-1,4 kg
Protection Level		IP65

VALVE TECHNICAL FEATURES


Features		Values
Air quality classes (ISO 8573-1)	For Solid	2
	For Water with $T > +3^{\circ}\text{C}$	4
	For Water with $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	For Water with $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	For Oil	1



PARTS LIST


No.	Description	Material
1	Screw M6	SS
2	Washer	SS
3	Cover 1"	Die Cast Alu
4a	STD Diaphragm 1" Kit	NBR
4b	HI Diaphragm 1" Kit	VITON
5	Body 1" Integrated	Die Cast Alu
6	Body Tank O'Ring	NBR
7	Body Pipe O'Ring	NBR
8	Clamp 1"	Die Cast Alu
9	Pipe O'Ring	NBR
10	Washer 1"	Pa + Ela
11	Blow Pipe 1"	CS or SS
12	Round Nut	CS
13	Rubber Washer	
14	Hexagonal Nut	CS
15	Rubber Slave	
16	Nut	CS
E	Optional Fitting	Nickeled Brass

Immagine

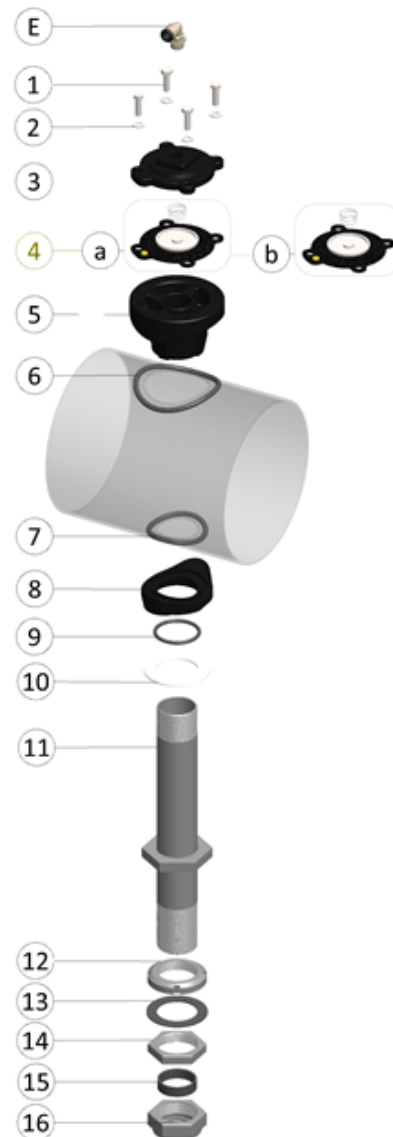



DIMENSIONAL LAYOUT

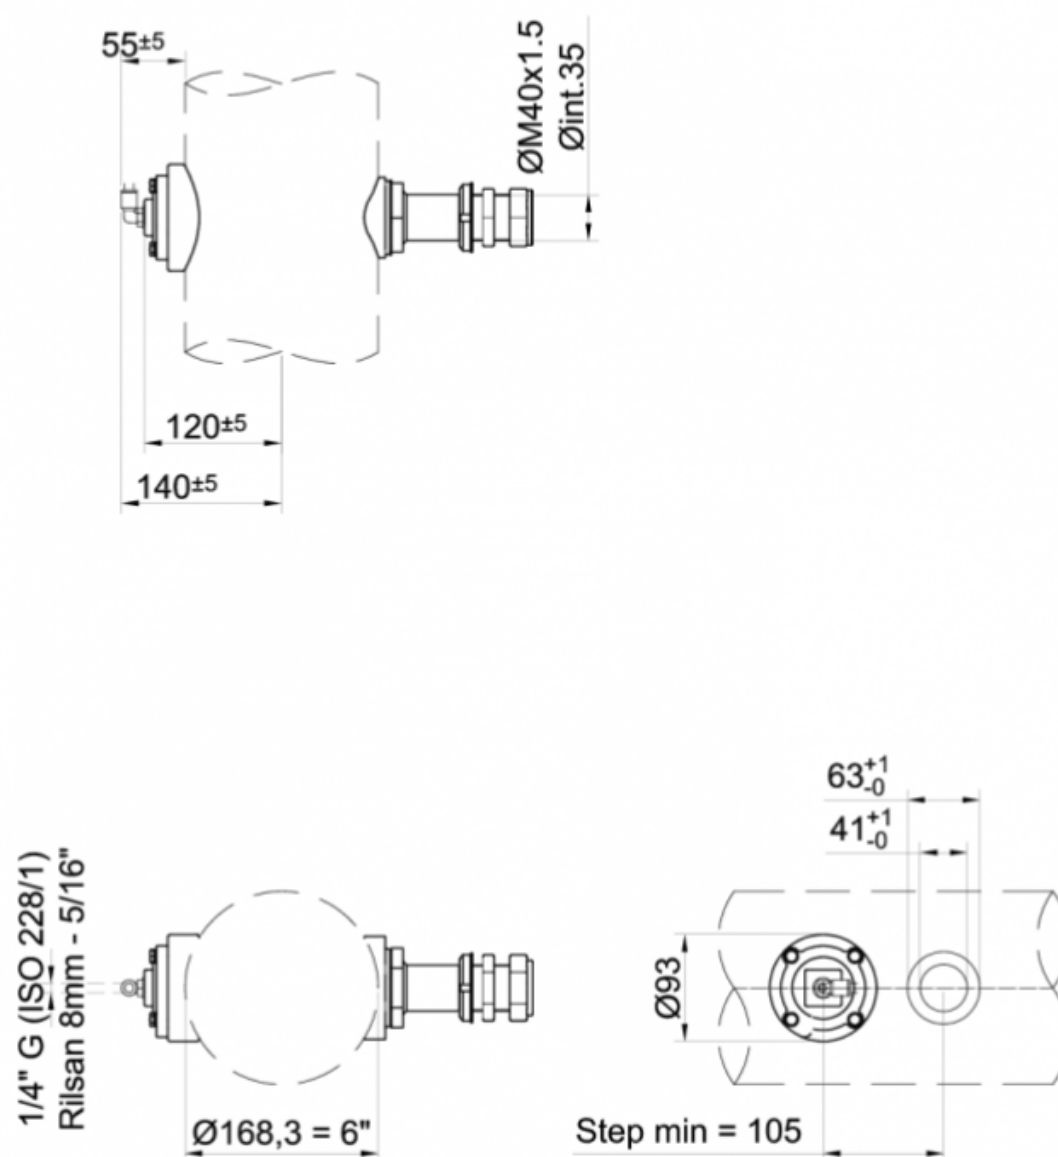

CONSUMPTION GRAPHS

