1" ½ VALVES

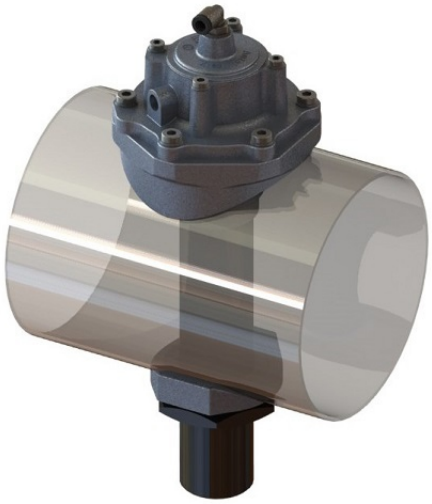

INTEGRATED DOUBLE STAGE FOR Ø 6 " TANK

AE2440I06 With Pneumatic Valve

High performance valves integrated in the tank

3 WARRANTY YEARS

PATENTED

PRODUCT CERTIFICATIONS

STANDARD

CE

OPZIONALI

Ex 2GD EAC

VALVE TECHNICAL FEATURES

Features		Values
Out		Pipe 1"1/2
Working Pressure		1,5-8 bar
Standard Temperature Range		-40 °C ; +100 °C
High Range Temparature		-20 °C ; +200 °C
Kv		62 m^3/h
Weight		2.6-2.8 kg
Protection Level		IP65

Autel S.r.l. | Via Bagnoli, 9 - 41049 Sassuolo, Modena
Tel. +39 (0) 536 802104 - Fax. +39 (0) 536 803372 - info@aeautel.it
C.F. e P. IVA 00963880364

VALVE TECHNICAL FEATURES

Features		Values
Air quality classes (ISO 8573-1)	For Solid	2
	For Water with T > +3°C	4
	For Water with -20°C < T < +3°C	3
	For Water with -40°C < T < -20°C	2
	For Oil	1

Autel S.r.l. | Via Bagnoli, 9 - 41049 Sassuolo, Modena
Tel. +39 (0) 536 802104 - Fax. +39 (0) 536 803372 - info@aeautel.it
C.F. e P. IVA 00963880364

PARTS LIST

No.	Description	Material
1	Screw M6	SS
2	Washer	SS
3	Cover 3/4"	Die Cast Alu
4	Diaphragm 3/4"	TPE
5	Screw M8	SS
6	Washer	SS
7	Cover 1" 1/2	Die Cast Alu
8a	STD Diaphragm 1" 1/2	TPE
8b	HT Diaphragm 1" 1/2 Kit	NBR+PTFE
9	Body 1 "1/2 Integreated	Die Cast Alu
10	Body Pipe O'Ring	NBR
11	Body Tank O'Ring	NBR
12	Clamp Tank O'Rin	NBR
13	Clamp 1" 1/2	Die Cast Alu
14	Pipe Clamp O'Ring	NBR
15	Washer 1" 1/2	Pa 6,6+ Ela
16	Blow Pipe 1" 1/2	CS or SS
E	Optional Fitting	Nickeled Brass

Immagine

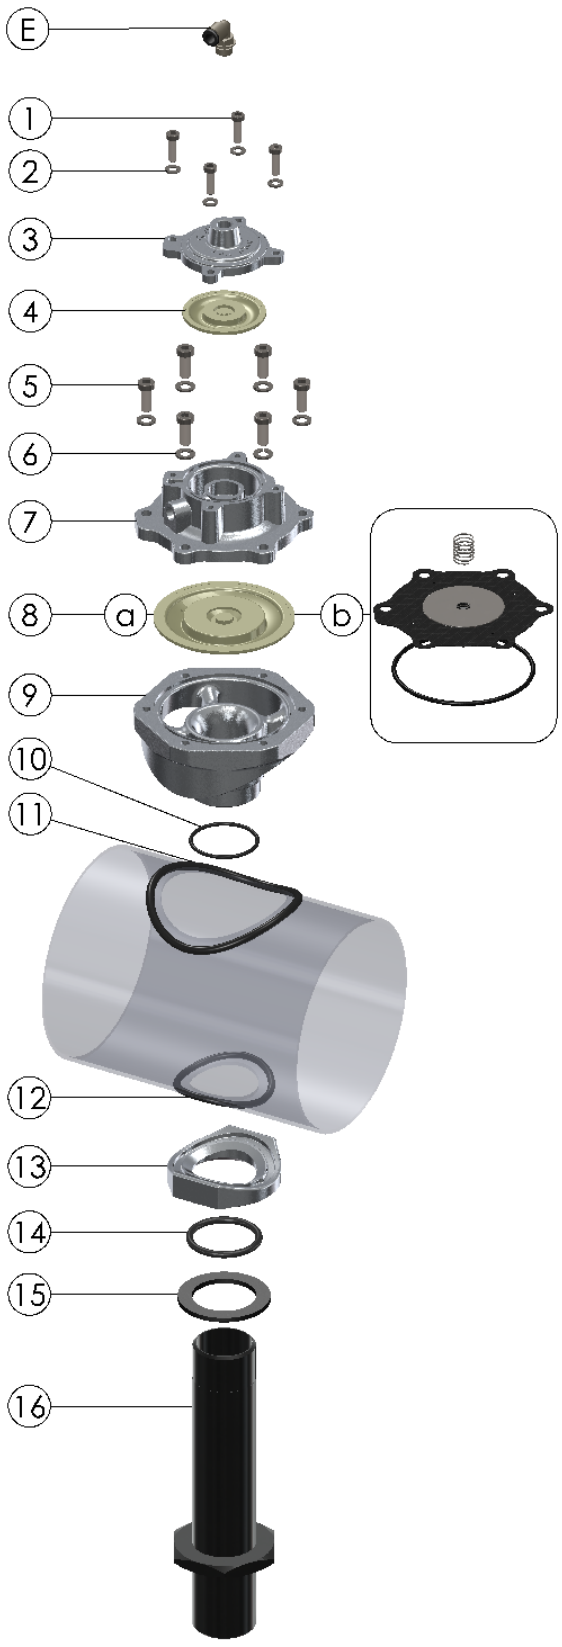

Autel S.r.l. | Via Bagnoli, 9 - 41049 Sassuolo, Modena
Tel. +39 (0) 536 802104 - Fax. +39 (0) 536 803372 - info@aeautel.it
C.F. e P. IVA 00963880364

DIMENSIONAL LAYOUT

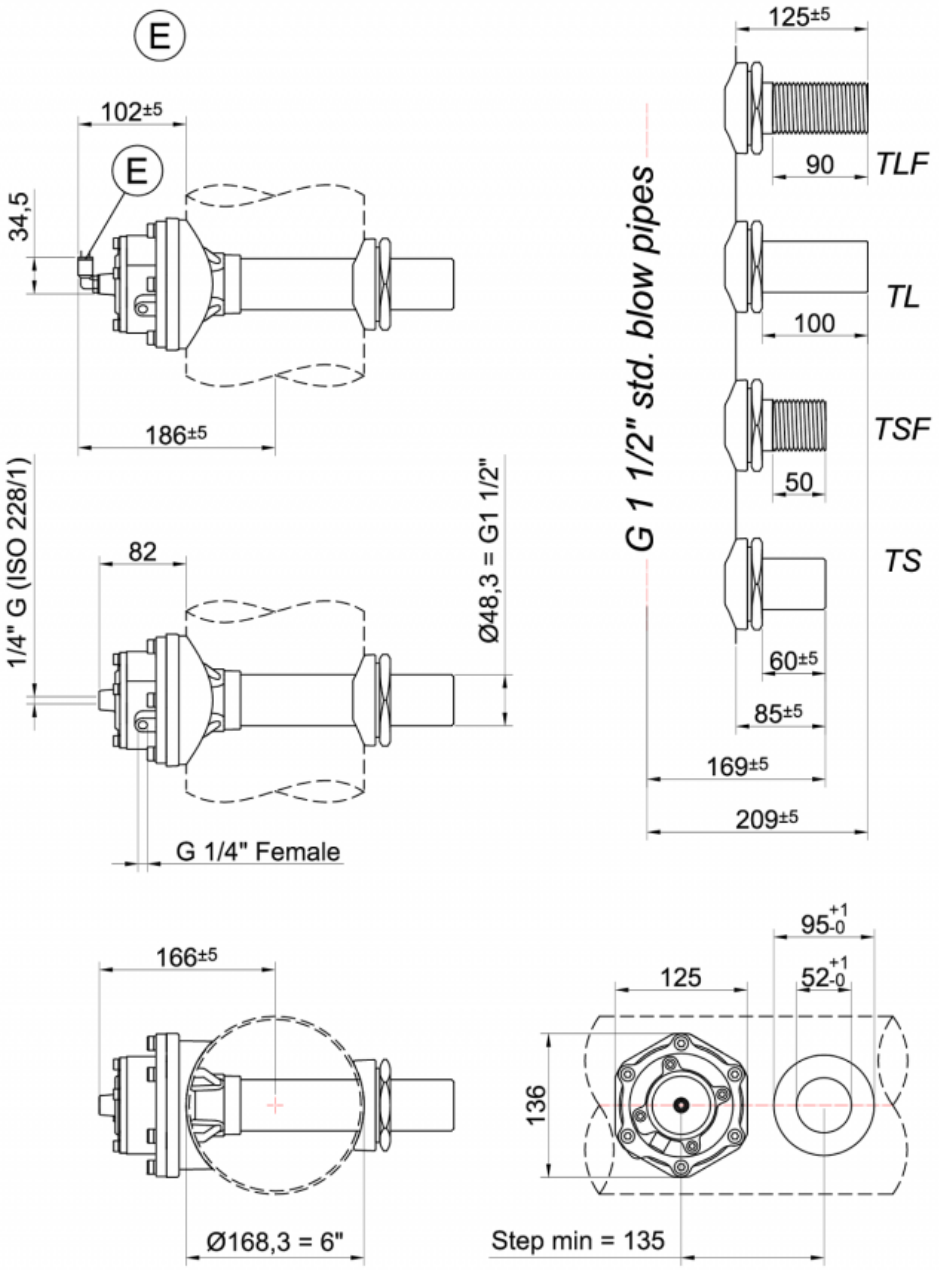
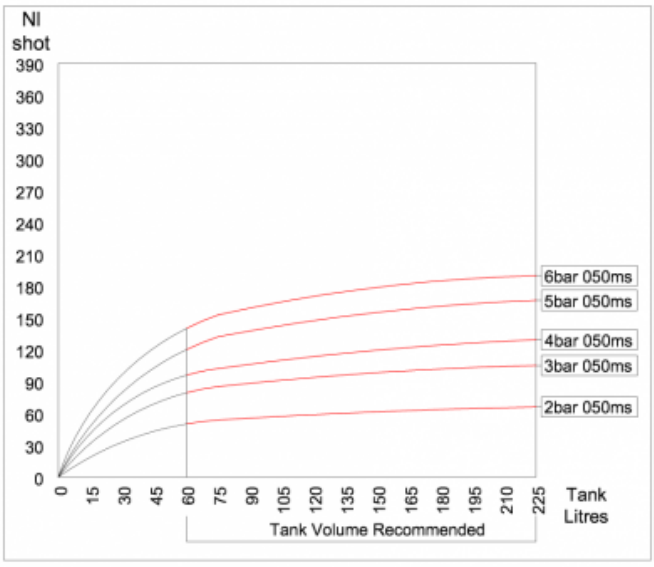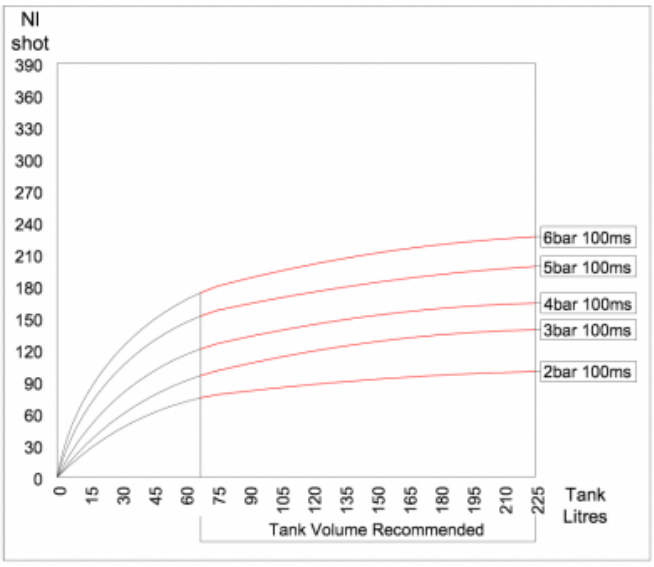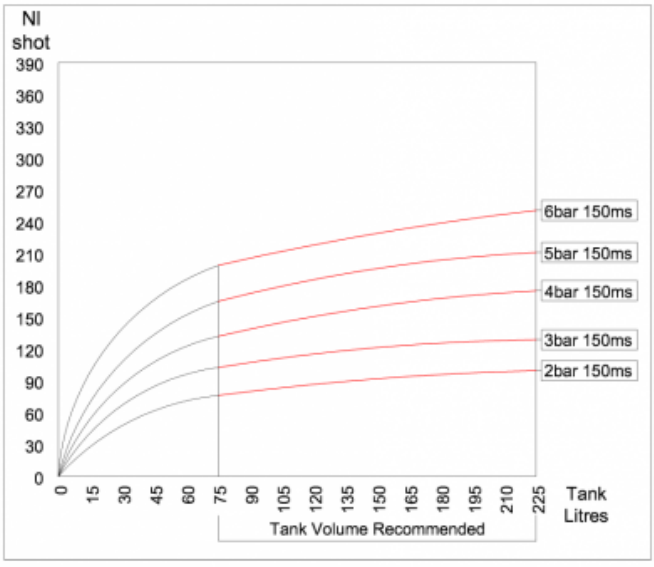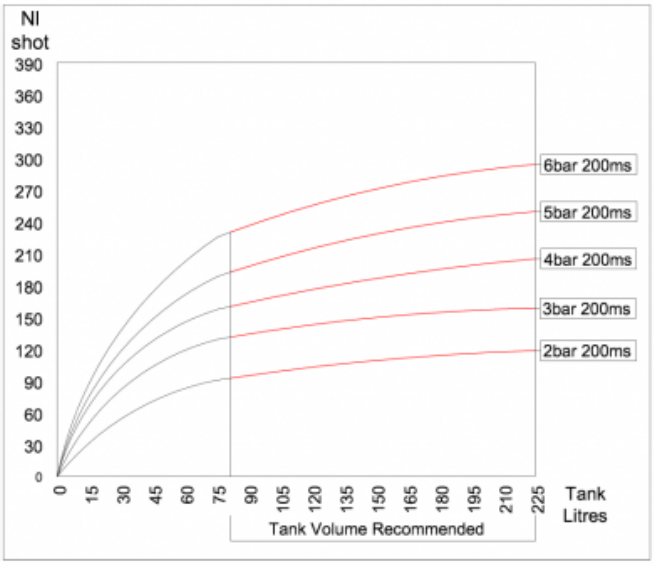
CONSUMPTION GRAPHS