1" VALVES

SCREW - SMALL BODY

AE2822B With Pneumatic Valve

The classic 90° valve with female thread

3 WARRANTY YEARS

PRODUCT CERTIFICATIONS

STANDARD

CE

OPZIONALI

EAC

VALVE TECHNICAL FEATURES

Features		Values
Out		1" Gas
In		1" Gas
Working Pressure		1,5-8 bar
Standard Temperature Range		-40 °C ; +100 °C
High Range Temparature		-20 °C ; +200 °C
Kv		21 m^3/h
Weight		0.29 kg
Protection Level		IP65

Autel S.r.l. | Via Bagnoli, 9 - 41049 Sassuolo, Modena
Tel. +39 (0) 536 802104 - Fax. +39 (0) 536 803372 - info@aeautel.it
C.F. e P. IVA 00963880364

VALVE TECHNICAL FEATURES

Features		Values
Air quality classes (ISO 8573-1)	For Solid	2
	For Water with T > +3°C	4
	For Water with -20°C < T < +3°C	3
	For Water with -40°C < T < -20°C	2
	For Oil	1

Autel S.r.l. | Via Bagnoli, 9 - 41049 Sassuolo, Modena
Tel. +39 (0) 536 802104 - Fax. +39 (0) 536 803372 - info@aeautel.it
C.F. e P. IVA 00963880364

PARTS LIST

No.	Description	Material
1	Screw M6	SS
2	Washer	SS
3	Cover 3/4"	Die Cast Alu
4a	STD Diaphragm 1 "	TPE
4b	HT Diaphragm 1" Kit	NBR+PTFE
5	Body 1" Screw	Die Cast Alu
E	Optional Fitting	Nickeled Brass

Immagine

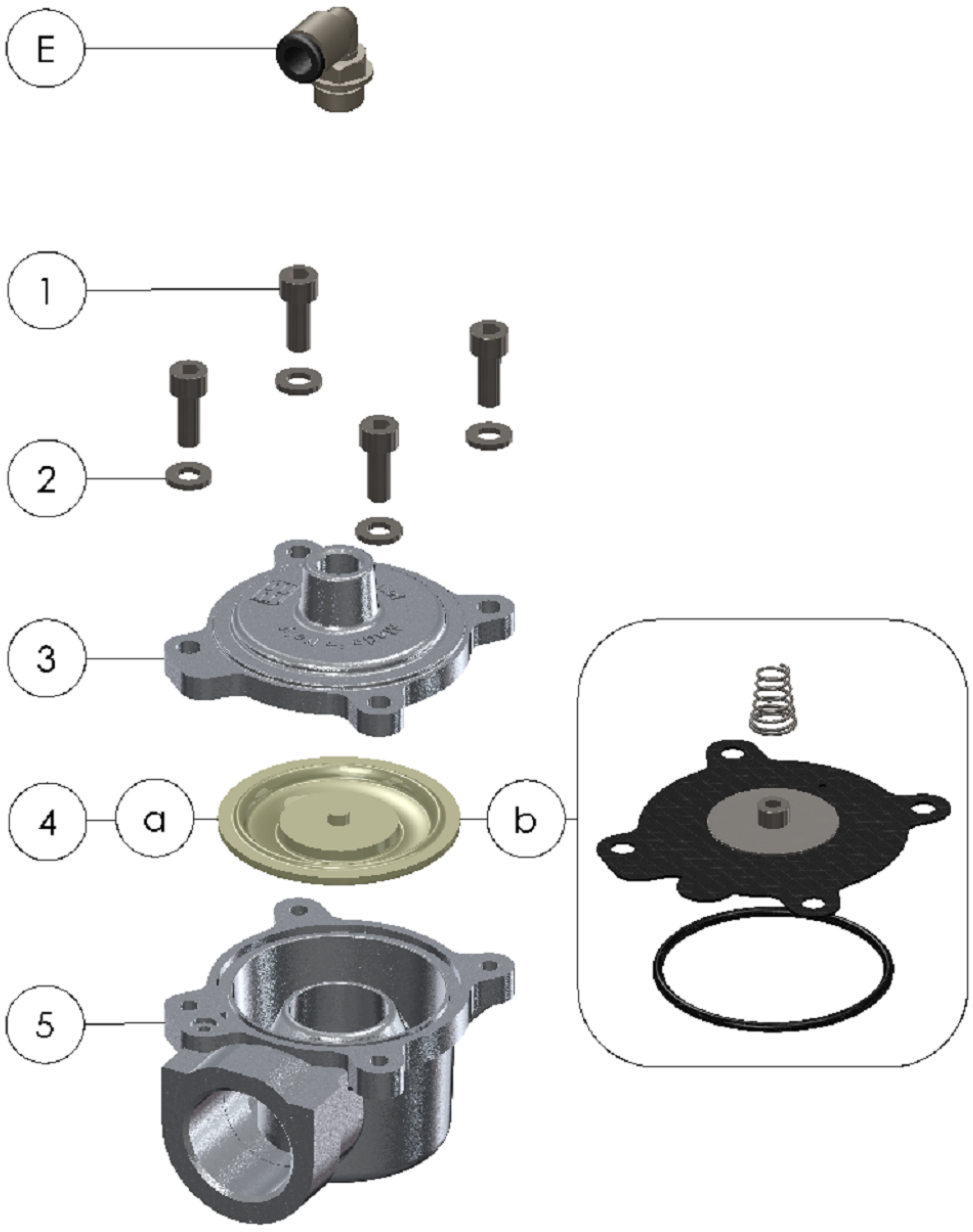

DIMENSIONAL LAYOUT

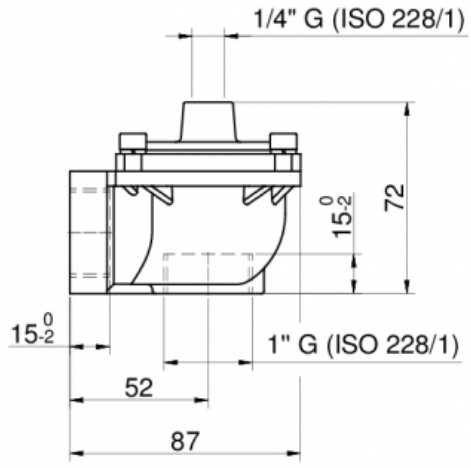

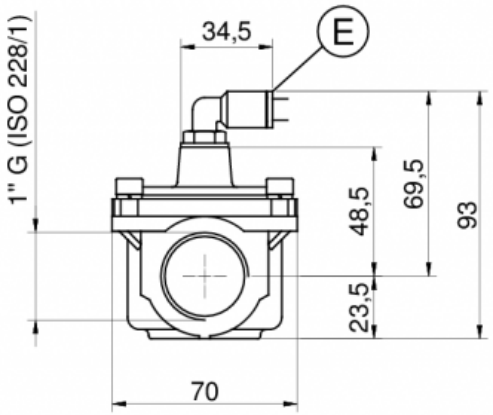

E *Dimension with optional fitting for rilsan pipe Ø 8 mm*

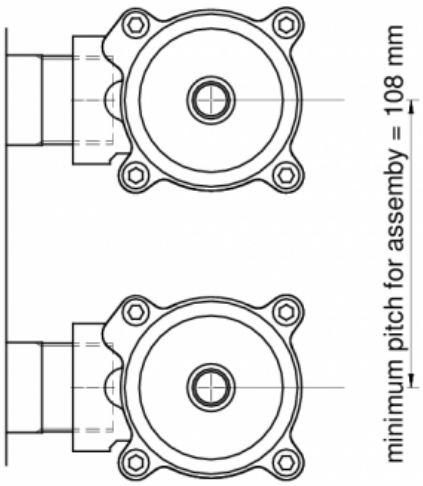
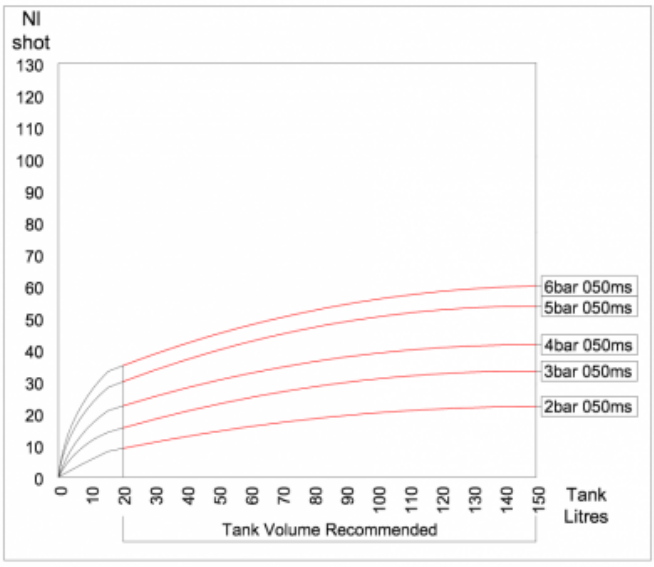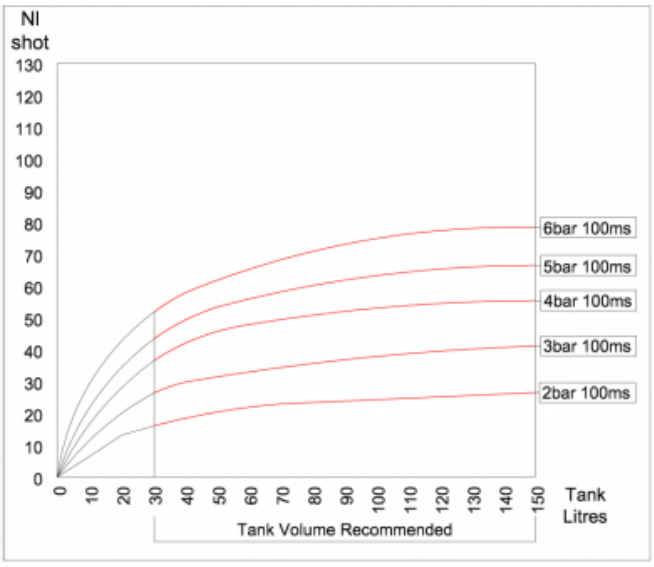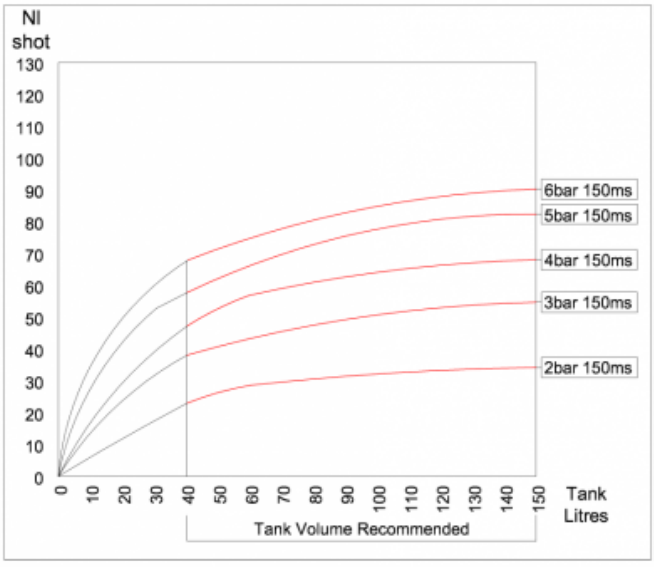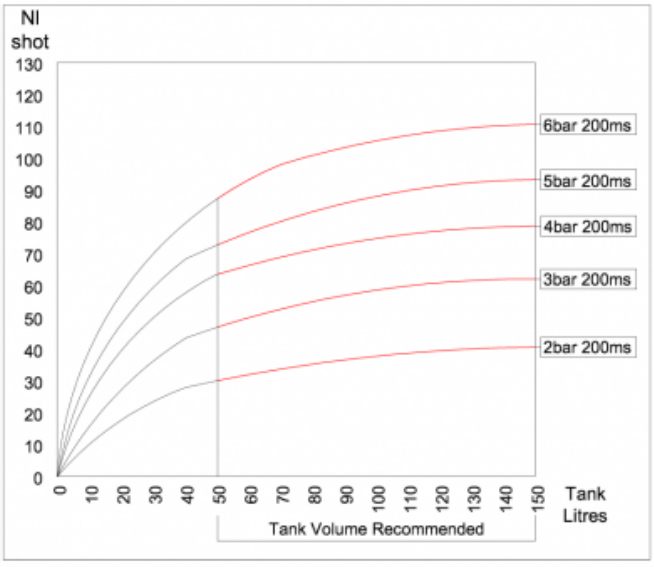
CONSUMPTION GRAPHS